


- ✓ Complete Line of Hydraulic Power Products and Accessories Customizable
- ✓ Use Existing Hydraulics with our Fluid Utilization Specialists

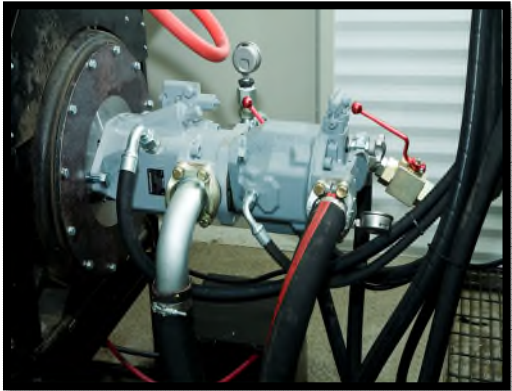

OPTIONS

- ✓ Safety Shut Downs Low Level and High Temp
- ✓ Reservoir Size Range from 160L to 500L
- ✓ Hydraulic Oil Power Fluid is Brand Specific to Producer or Generic to Application
- ✓ Filtration External or Internal Available
- ✓ Mounting Skid Sizes Range from 4' x 8' to 12' x 12' for all Applications including Containment and Load Requirement
- ✓ Housing Options Utilidor, Self Framing, Wood, Seacan Housing Available depending on Environment
- ✓ Sound Attenuation Sound Attenuation Materials and Designs for Quiet Zone Applications
- ✓ High/Low Temp Operations Air Flow and Air Recycle Designs Available for Extreme Temperatures

HYDRAULIC PUMP OPTIONS

Brand Specific

- RexRoth
- Kawasaki
- Eaton
- Sauer
- Vickers etc

Displacement

- Displacement from 22 GPM (70cc) to 45 GPM (100cc)

Pressure Ratings

- Max Pressures of up to 4000 PSI

PRIME MOVERS

NG Power Brand Specific

- GM
- Cumin's
- Origin
- Kubota
- Ford
- Waukesha
- CAT

HP Requirements

- From 20HP – 200 HP and from 225 GP – 1200 HP Available

Electric Over Hydraulic

- Brand Specific to the Producer or Generic Branded to Application